

# innr




Anyone can be smart, with Innr.

# Our Mission



To Bring the Comfort  
of Smart Lighting  
Within Reach of Everyone

# Smart Lighting Specialist Since 2012

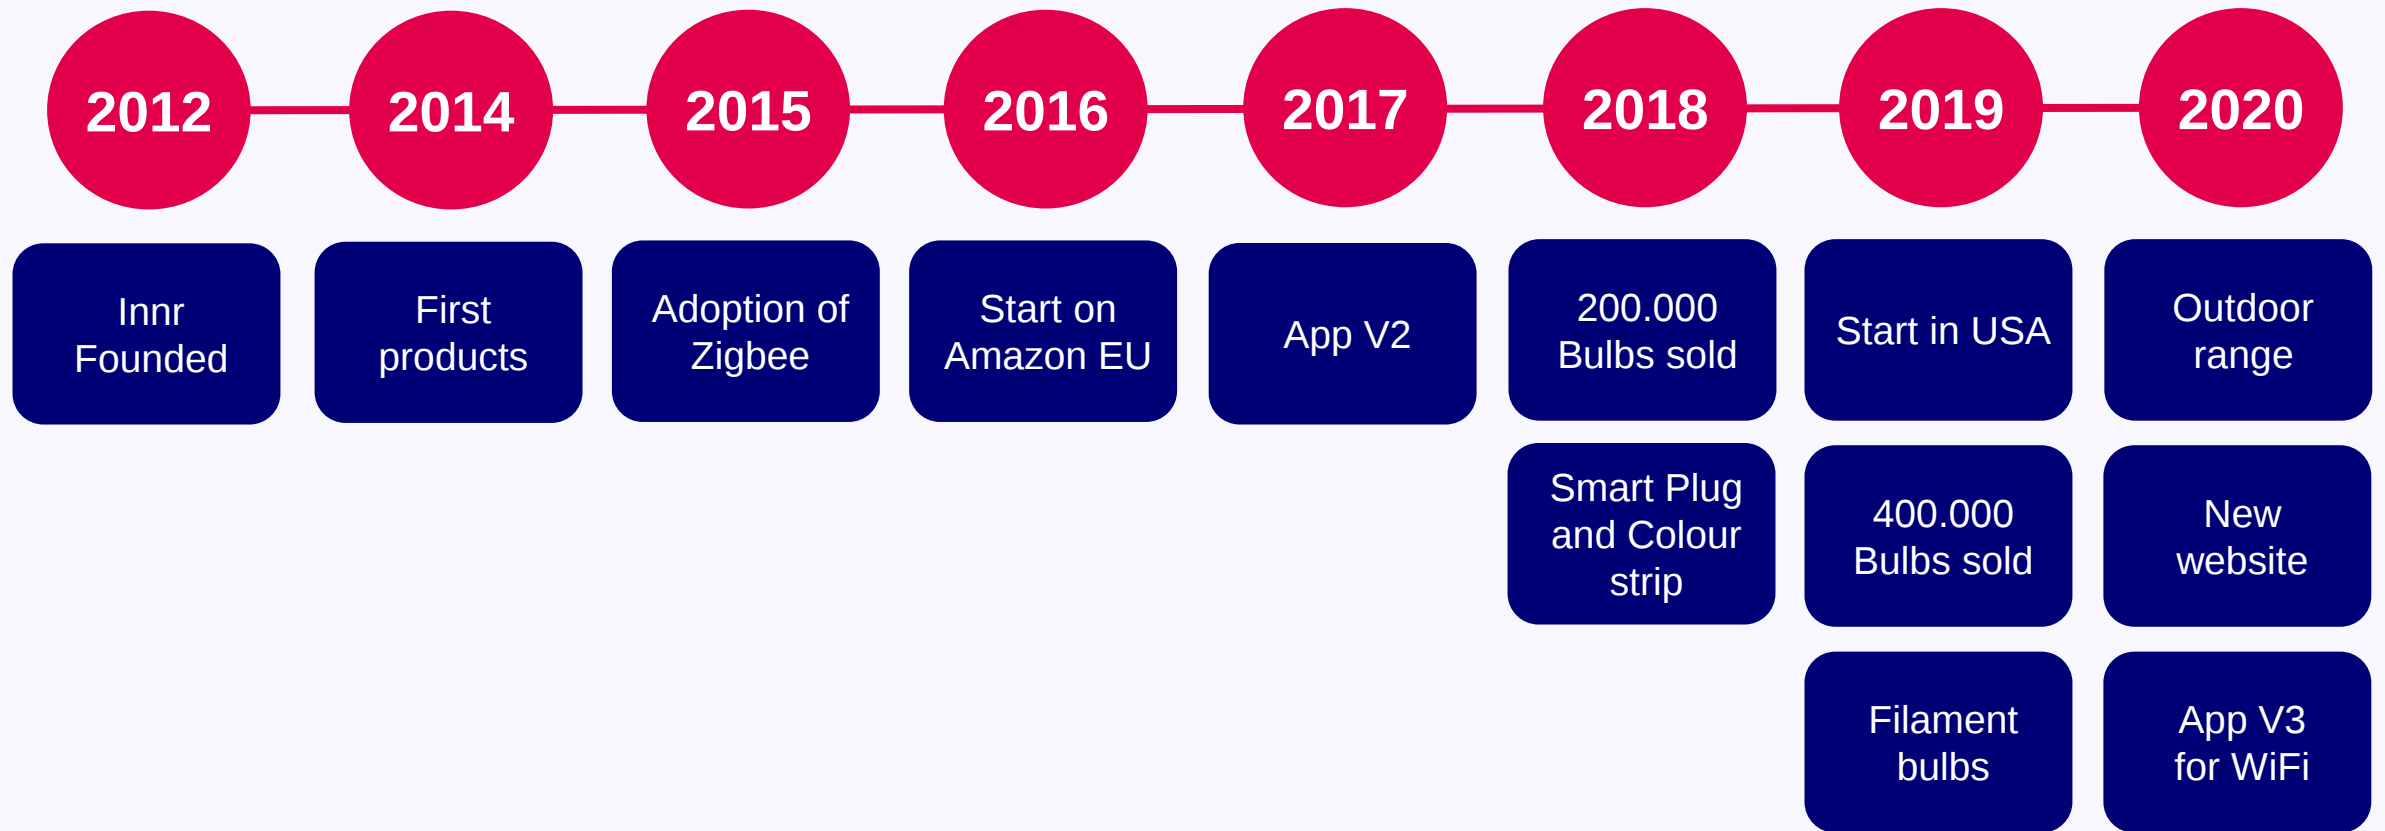

# Innr Offers a Unique Ecosystem

## Affordable Quality lighting



### Affordable premium

The only serious alternative for Philips Hue



### Wide assortment

Expanding portfolio of Lights, luminaires and controls for home and garden



### Unique Hybrid system



Combines low entry barrier with the endless expansion possibilities



### Dedicated Smart Lighting app

Similar features & ease of use as premium smart lighting brands


# A Wide and Growing Line-Up of Affordable Premium Products

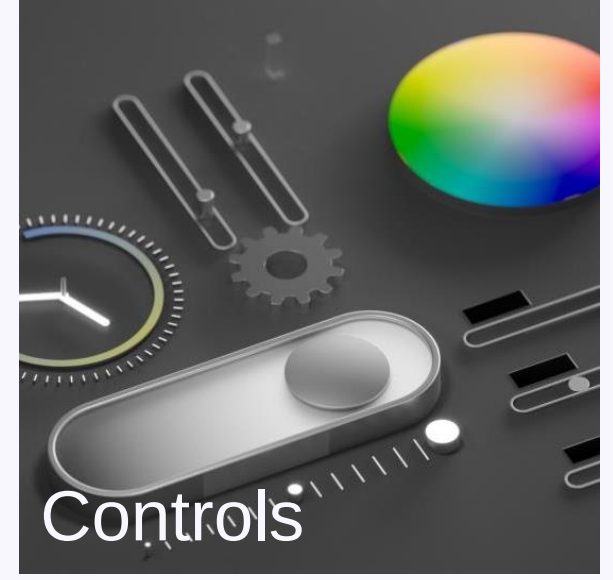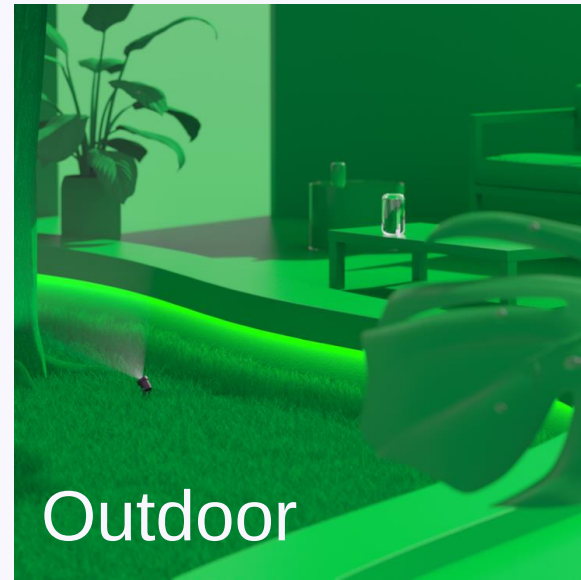


# Strong and Consistent Packaging



# A Smart Lighting App with Premium Features

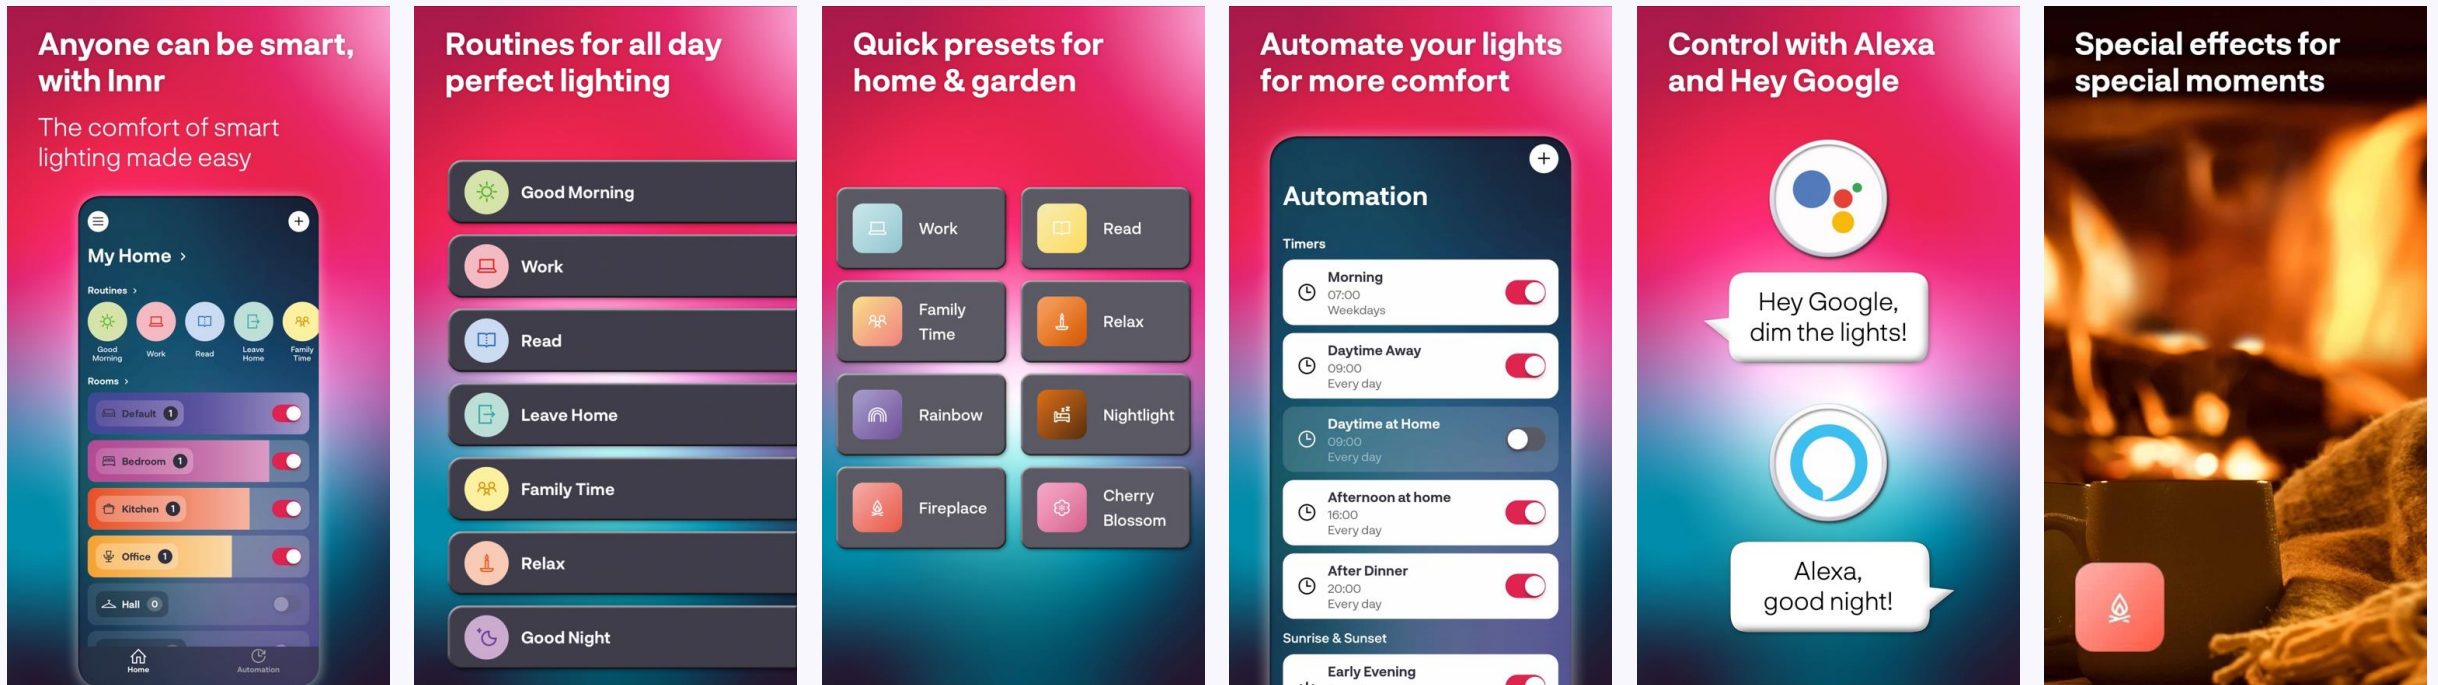

# Offering Real Benefits for Real People

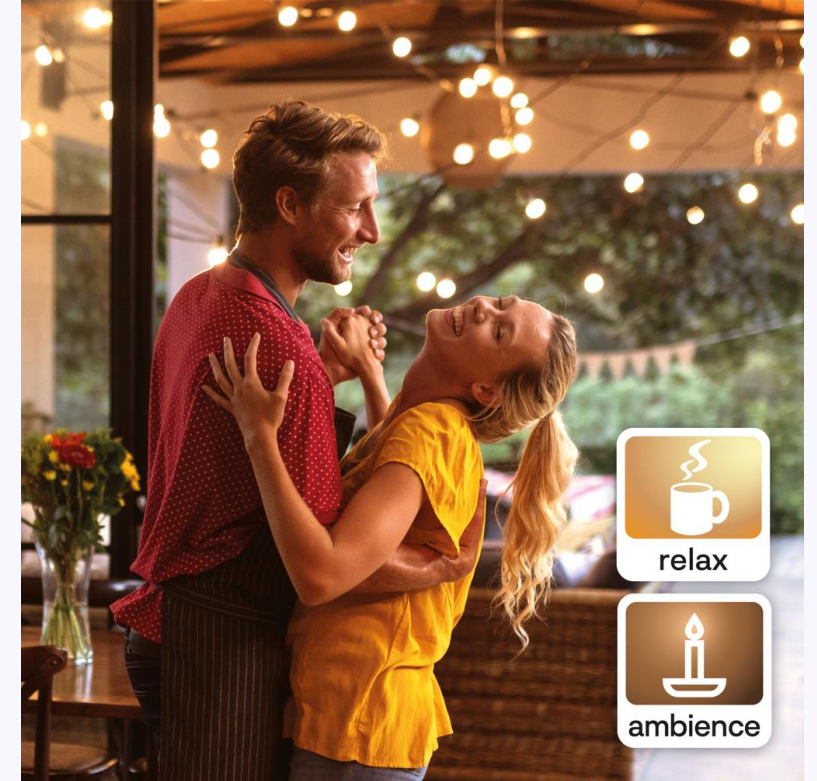



Innr  
Zigbee  
product range



# E14 Retrofit Candles



# Smart Candle White

RB 245-2



- Smart Candle E14
- Zigbee 3.0
- 220-240V/50-60Hz, 4.8W
- 470lm – (ref. 40W incandescent bulb)
- 2.700K Warm White
- Beam angle 300°
- Dimming range 3-100%
- Dimensions H 110mm x ø 38mm
- CRI > 80
- Life span > 25.000hrs

# Smart Candle Comfort

## RB 248 T-2



- Smart Candle E14
- Zigbee 3.0
- 220-240V/50-60Hz, 5.8W
- 470lm – (ref. 40W incandescent bulb)
- 2.200K - 5.000K Comfort
- Beam angle 300°
- Dimming range 1-100%
- Dimensions H 110mm x ø 38mm
- CRI > 80
- Life span > 25.000hrs



# Smart Candle Colour

RB 250 C

RB 250 C-2

- Smart Candle E14
- Zigbee 3.0
- 220-240V/50-60Hz, 6W
- 470lm – (ref. 40W incandescent bulb)
- RGB + 1.800K - 6.500K White
- Beam angle 300°
- Dimming range 5-100%
- Dimensions H 110mm x ø 38mm
- CRI > 80
- Life span > 25.000hrs



# B22 Retrofit Bulbs



# Smart Bulb White

BY 265-2

- Smart Bulb B22 (UK)
- Zigbee 3.0
- 220-240V/50-60Hz, 9W
- 806lm – (ref. 60W incandescent bulb)
- 2.700K Warm White
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs



# Smart Bulb Colour

## BY 285 C-2



- Smart Bulb B22 (UK)
- Zigbee 3.0
- 220-240V/50-60Hz, 9.5W
- 806lm – (ref. 60W incandescent bulb)
- RGB + 1.800K - 6.500K White
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs

# Smart Filament Bulb Vintage

BF 263-2

- Smart Filament Bulb B22 (UK)
- Zigbee 3.0
- 220-240V/50-60Hz, 4.2W
- 350lm – (ref. 30W incandescent bulb)
- 2.200K Vintage (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 15.000hrs



# Smart Filament Bulb White

BF 265-2

- Smart Filament Bulb B22 (UK)
- Zigbee 3.0
- 220-240V/50-60Hz, 6.3W
- 806lm – (ref. 60W incandescent bulb)
- 2.700K Warm White (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 15.000hrs



# E27 Retrofit Bulbs



# Smart Bulb White

RB 265-3



- Smart Bulb E27
- Zigbee 3.0
- 220-240V/50-60Hz, 9W
- 806lm – (ref. 60W incandescent bulb)
- 2.700K Warm White
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs

# Smart Bulb Comfort

## RB 278 T-2



- Smart Bulb E27
- Zigbee 3.0
- 220-240V/50-60Hz, 9W
- 806lm – (ref. 60W incandescent bulb)
- 2.200K - 5.000K Comfort
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs



# Smart Bulb Colour

RB 285 C

RB 285 C-2

- Smart Bulb E27
- Zigbee 3.0
- 220-240V/50-60Hz, 9.5W
- 806lm – (ref. 60W incandescent bulb)
- RGB + 1.800K – 6.500K White
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs



# Smart Filament Globe Vintage

RF 261-2



- Smart Filament Globe E27
- Zigbee 3.0
- 220-240V/50-60Hz, 4.2W
- 350lm – (ref. 30W incandescent bulb)
- 2.200K Vintage (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 155mm x ø 95mm
- CRI > 80
- Life span > 15.000hrs

# Smart Filament Bulb Vintage

RF 263-2

- Smart Filament Bulb E27
- Zigbee 3.0
- 220-240V/50-60Hz, 4.2W
- 350lm – (ref. 30W incandescent bulb)
- 2.200K Vintage (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 120mm x ø 60mm
- CRI > 80
- Life span > 15.000hrs



# Smart Filament Edison Vintage

RF 264-2

- Smart Filament Edison E27
- Zigbee 3.0
- 220-240V/50-60Hz, 4.2W
- 350lm – (ref. 30W incandescent)
- 2.200K Vintage (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 160mm x ø 64mm
- CRI > 80
- Life span > 15.000hrs



# GU10 Retrofit Spots



# Smart Spot White

RS 226-2

RS 226-4

- Smart Spot GU10
- Zigbee 3.0
- 220-240V/50-60Hz, 4.8W
- 350lm – (ref. 50W incandescent bulb)
- 2.700K Warm White
- Beam angle 36°
- Dimming range 2-100%
- Dimensions H 54mm x ø 50mm
- CRI > 80
- Lifetime > 25.000hrs





# Smart Spot Comfort

RS 229 T-2

RS 229 T-4

- Smart Spot GU10
- Zigbee 3.0
- 220-240V/50-60Hz, 5W
- 350lm – (ref. 50W incandescent bulb)
- 2.200K - 5.000K Comfort
- Beam angle 42°
- Dimming range 1-100%
- Dimensions H 54mm x ø 50mm
- CRI > 80
- Lifetime > 25.000hrs



# Smart Spot Colour


RS 230 C

RS 230 C-2

- Smart Spot GU10
- Zigbee 3.0
- 220- 240V/50-60Hz, 6W
- 350lm – (ref. 50W incandescent bulb)
- RGB + 1.800K - 6.500K White
- Beam angle 36°
- Dimming range 5-100%
- Dimensions H 61 mm x ø 50 mm
- CRI > 80
- Life span > 25.000hrs



Luminaires

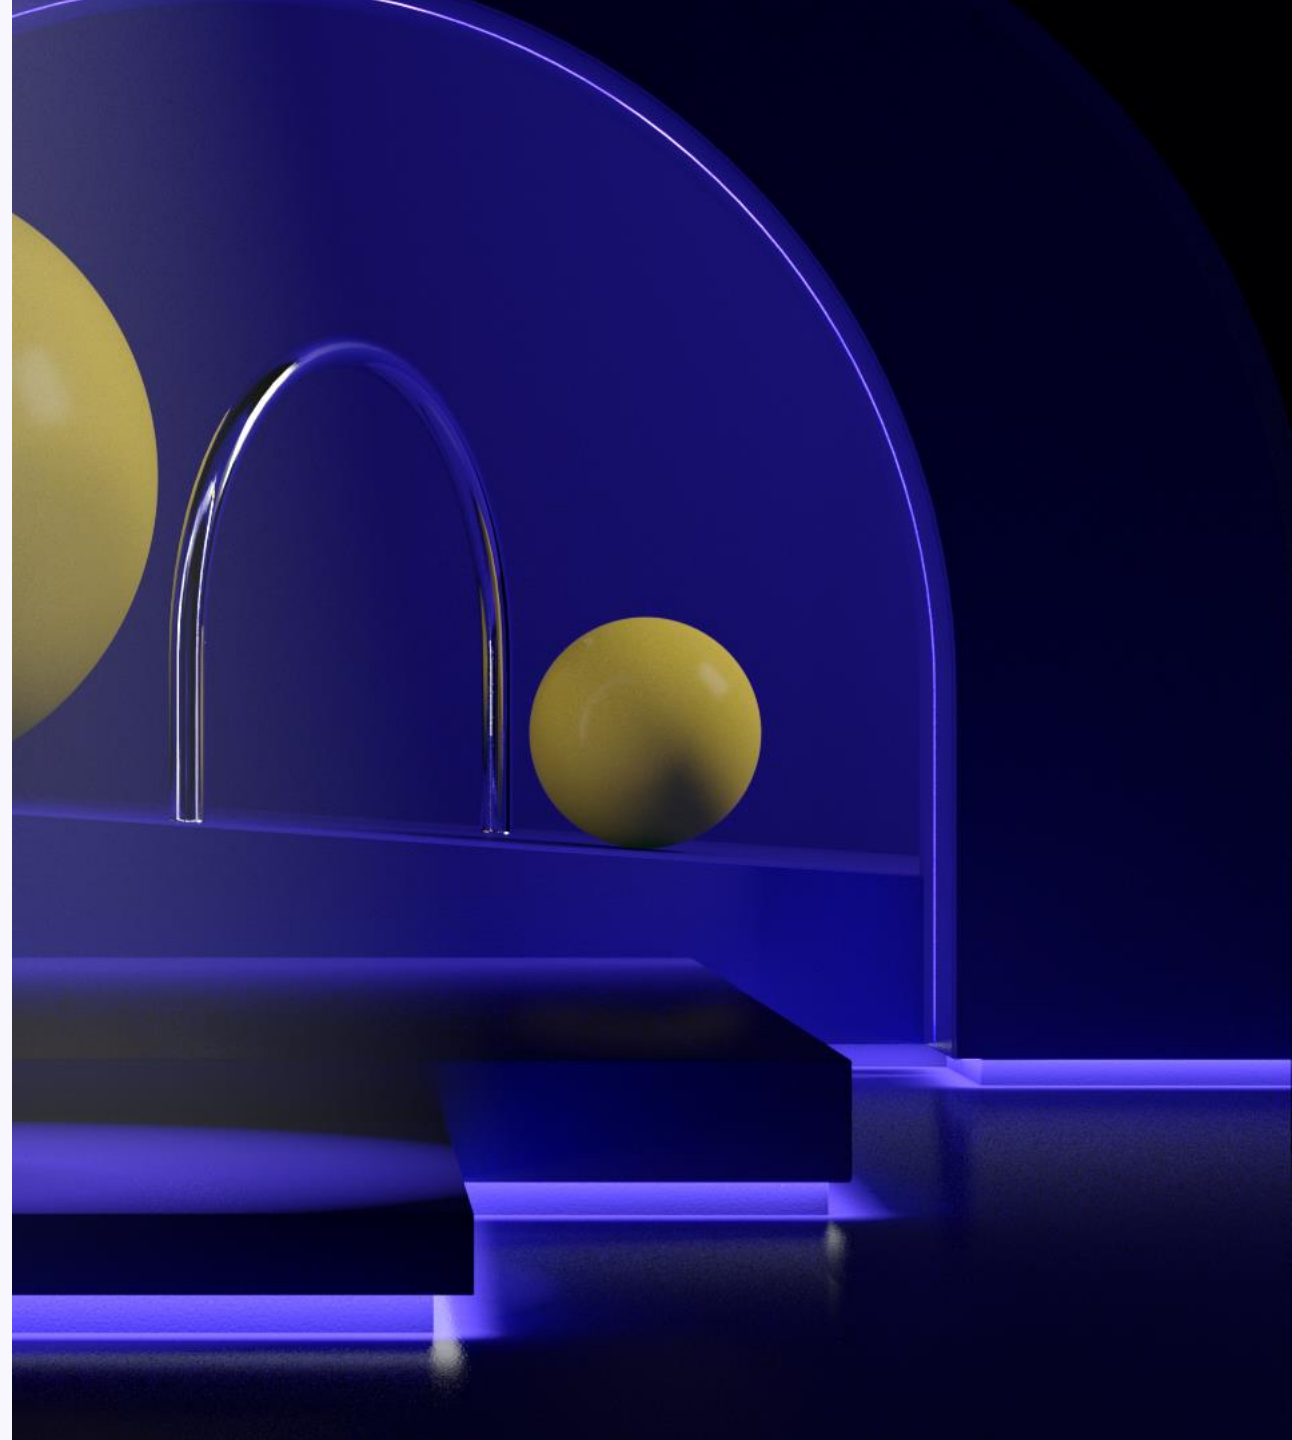

# Smart Flex Light 2m Colour

## FL 120 C



- Smart Flex Light 2 meter
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 12 W
- 600lm | 120 LEDs Total (30 RGB + 30 WW LEDs / m)
- RGB + 1.800K - 6.500K White
- Beam angle 120°
- Dimming range 1%-100%
- Dimensions: 2m LED strip -
- Including Control Box and Power Adaptor
- CRI > 85
- Life span > 25.000hrs

# Smart Flex Light 4m Colour

## FL 140 C



- Smart Flex Light 4 meter
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 24 W
- 1.200lm | 240 LEDs Total (30 RGB + 30 WW LEDs / m)
- RGB + 1.800K - 6.500K White
- Beam angle 120°
- Dimming range 1%-100%
- Dimensions: 4m LED strip -
- Including Control Box and Power Adaptor
- CRI > 85
- Life span > 25.000hrs

# Smart Flex Light 4m Colour


FL 140 C /LD

- Smart Flex Light 4 meter (LED Driver)
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 24 W
- 1.200lm | 240 LEDs Total (30 RGB + 30 WW LEDs / m)
- RGB + 1.800K - 6.500K White
- Beam angle 120°
- Dimming range 1%-100%
- Dimensions: 4m LED strip -
- Including Control Box and **LED driver**
- CRI > 85
- Life span > 25.000hrs




## Smart Flex Light Colour 2m

FL 120 C

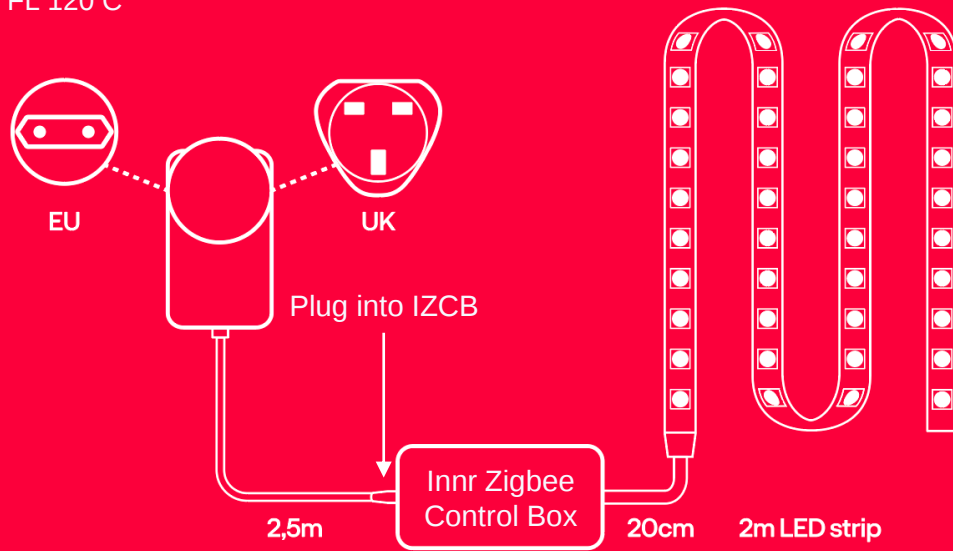


## Smart Flex Light Colour 4m

FL 140 C

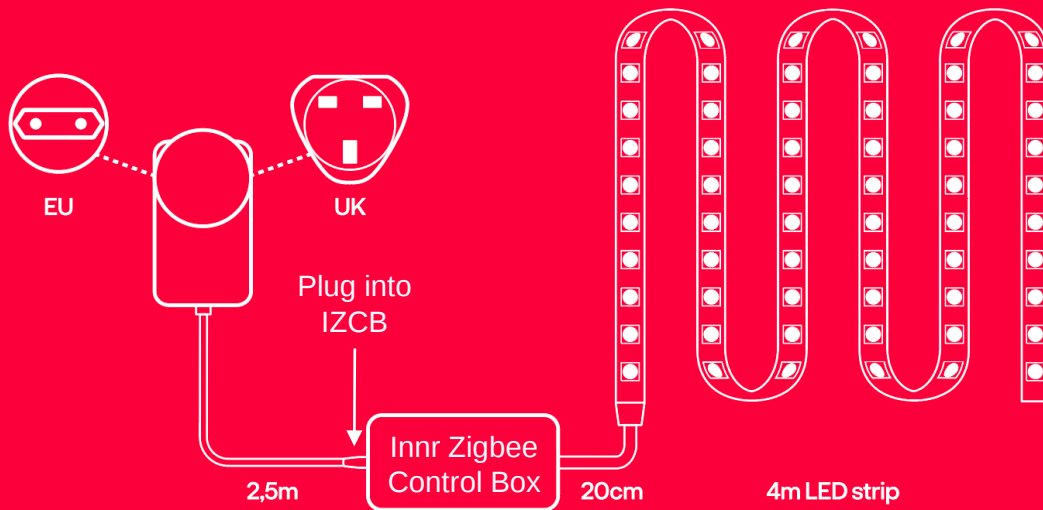

## Smart Flex Light Colour LED Driver

FL 140 C /LD

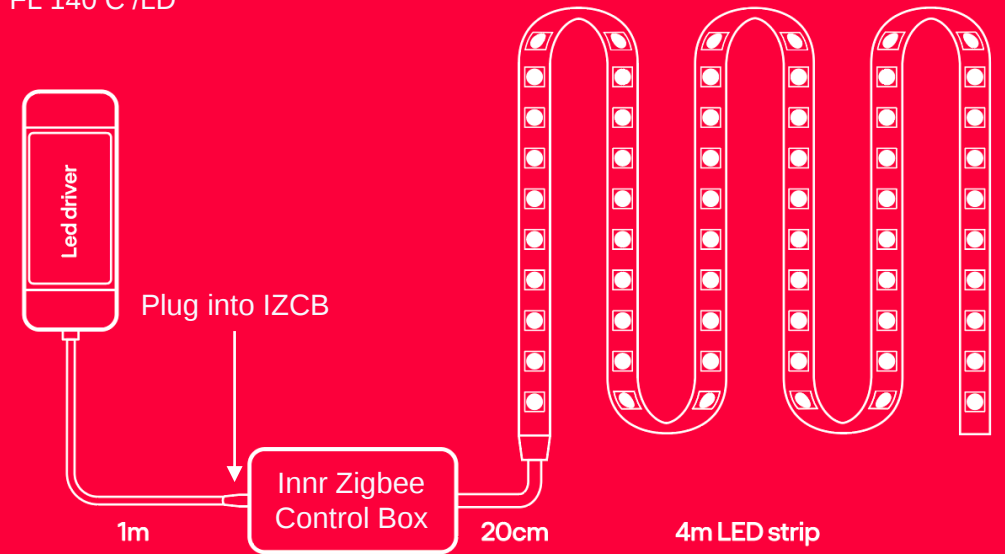

# Puck Light White 3-pack

PL 115



- 3x Smart Puck Light
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 3x 3W
- 495lm total | 165lm per puck light
- 2.700K Warm White
- Beam angle 120° | Dimming range 1%-100%
- Dimensions H 15mm x ø 70mm
- Including Control Box and Power Adaptor
- CRI > 82 | Lifetime > 25.000hrs
- Aluminum housing | IP20
- Connect up to 5 Puck Lights -  
Extension pack **PL 110 puck** available

# Puck Light White Extension

## PL 110 puck



- Puck Light
- Extension pack to **PL 115**
- 24V DC, 3W
- 165lm per Puck Light
- 2.700K Warm White
- Beam angle 120°
- Dimming range 1%-100%
- Dimensions H 15mm x ø 70mm
- CRI > 82 | Lifetime > 25.000hrs
- Aluminum housing | IP20
- Connect up to max. 5 Puck Lights  
Note: Max. 2 additional pucks to the set of 3 (**PL 115**),  
hence in total max. 5 pucks to one control-box

# Recessed Spot Light White 3-pack

## RSL 115



- 3x Smart Recessed Spot Light
- Zigbee Light Link (ZLL)
- 220-240V, 50-60Hz, 24V DC, 15W
- 1.140lm total | 380lm per Spot Light
- 2.700K Warm White | Dimming range 1%-100%
- Beam angle 38° | Rotation angle 45°
- Dimension H 25mm x ø 86mm (Ultra thin)
- Including control box & LED driver
- CRI > 82 | Lifetime > 30.000hrs
- Aluminum housing | IP20
- Connect up to max. 5 Spot Lights - Extension pack **RSL 115 spot**

# Recessed Spot Light White Extension

## RSL 115 spot



- Recessed Spot Light
- Extension pack to **RSL 115**
- 24V DC, 4.3W
- 380lm per unit
- 2.700K Warm White | Dimming range 1%-100%
- Beam angle 38° | Rotation angle 45°
- Dimensions H 25 mm x ø 86mm (Ultra thin)
- CRI > 82 | Lifetime > 30.000hrs
- Aluminum housing | IP20
- Connect up to max. 5 Recessed Spot Lights  
Note: Max. 2 additional spots to a **RSL 115** set of 3 spots, hence in total max. 5 spots to one control-box

# Round Ceiling Lamp White

## RCL 110

- Smart Round Ceiling Lamp
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 21W
- 1.200lm
- 2.700K Warm White
- Beam angle 110°
- Dimming range 2,5%-100%
- Dimensions H 52mm x ø 300mm
- CRI > 80
- Lifetime > 30.000hrs
- **Metal** and Plastic | IP20



NEW!




# Round Ceiling Lamp Comfort

## RCL 240 T

- Smart Round Ceiling Lamp
- Zigbee 3.0
- 220-240V/50-60Hz, 24V DC, 28W
- 2.500lm
- 2.200K - 5.000K Comfort
- Beam angle 110°
- Dimming range 5-100%
- Dimensions H 72mm x ø 410mm
- CRI > 80
- Lifetime > 25.000hrs
- **Metal** and Plastic | IP20

Control

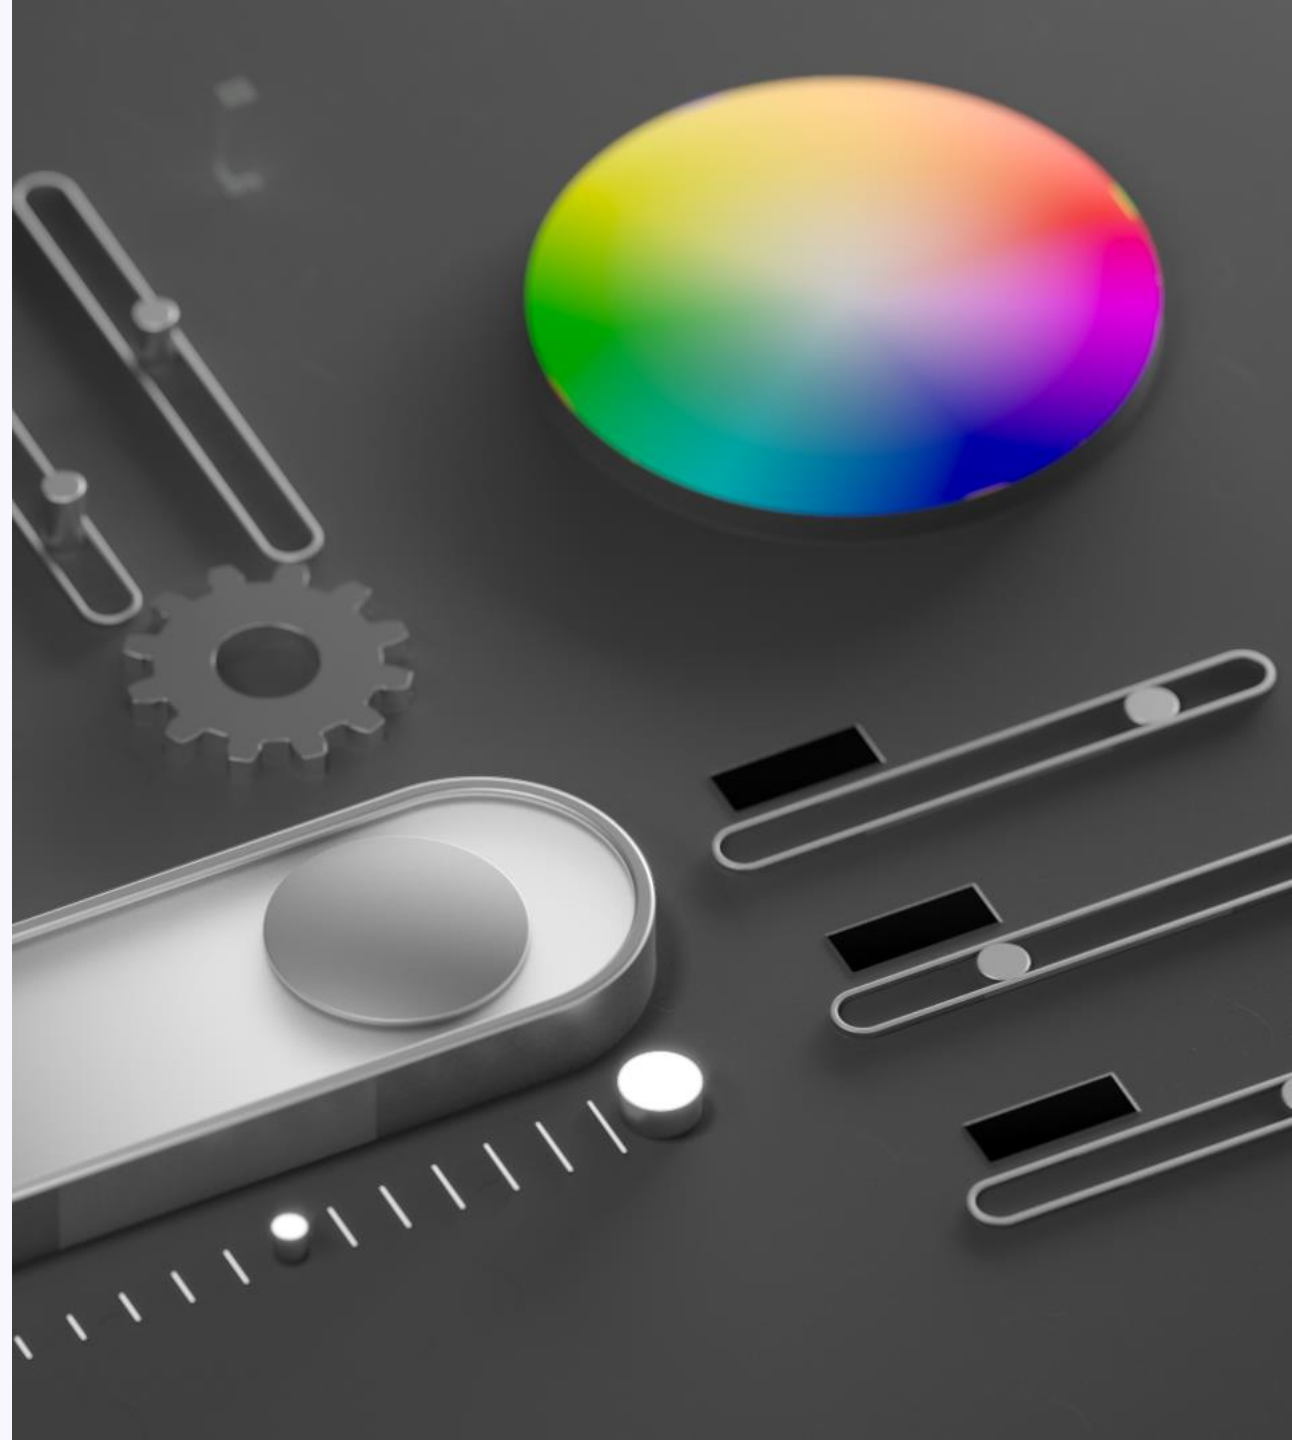



# Smart Plug (EU)

SP 220  
SP 220-2

- Smart Plug (EU)
- Zigbee 3.0
- 230V~/50Hz
- Max. 10A
- Compact design H 72mm x W 48mm x L 48mm
- Hue compatible, suitable for voice control
- Controls traditional lights and devices
- Range extender for improved reception



# Smart Plug (UK)

SP 222  
SP 222-2

- Smart plug (UK)
- Zigbee 3.0
- 240V~/50Hz
- Max. 13A
- Compact design H 65mm x W 56mm x L 56mm
- Hue compatible, suitable for voice control
- Controls traditional lights and devices
- Range extender for improved reception

Outdoor





# Smart Outdoor Flex Light 2m Colour

OFL 120 C

OFL 120 C /05 (UK)

- Smart Outdoor Flex light 2 meter
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 24W
- 550lm | 192 LEDs total (48 RGB + 48 WW LEDs / m)
- RGB + 1.800K - 6.500K White
- Dimming range 1%-100%
- Dimensions 2m strip
- Including control box and power adaptor
- CRI > 80 | Life span > 30.000hrs
- IP67 | Operating temperature: -20-+40°C
- 2m & 5m Extension Cables available, **OEC 120 & OEC 150**



# Smart Outdoor Flex Light 4m Colour

OFL 140 C


OFL 140 C /05 (UK)

- Smart Outdoor Flex light 4 meter
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 48W
- 1000lm | 384 LEDs Total (48 RGB + 48 WW LEDs / m)
- RGB + 1.800K - 6.500K White
- Dimming range 1%-100%
- Dimensions 4m strip
- Including control box and power adaptor
- CRI > 80 | Life span > 30.000hrs
- IP67 | Operating temperature: -20-+40°C
- 2m & 5m Extension Cables available, **OEC 120 & OEC 150**




## Extend the cable lenght

at the 5-pin connection points with the Innr Extension Cable 2m (OEC 120) or Extension Cable 5m (OEC 150)

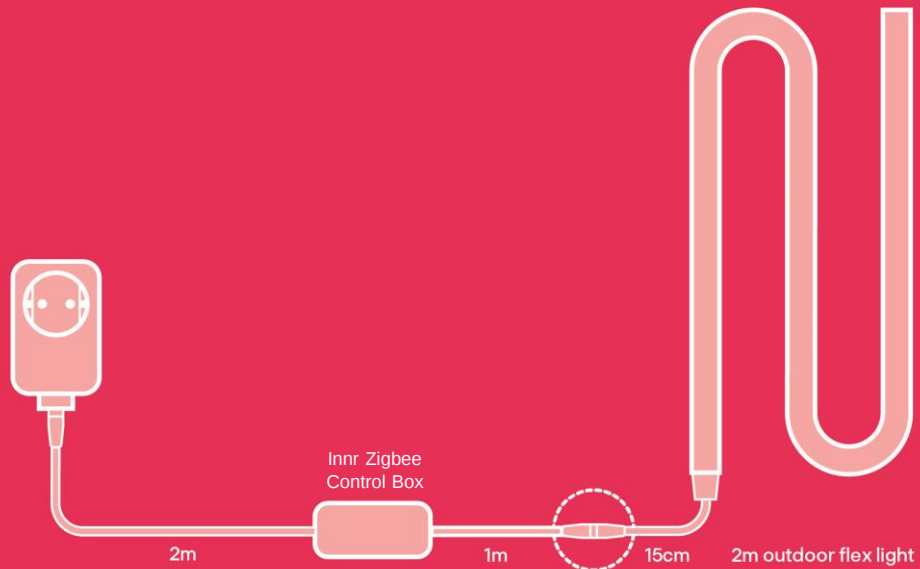

## Extend the cable lenght

at the 5-pin connection points with the Innr Extension Cable 2m (OEC 120) or Extension Cable 5m (OEC 150)

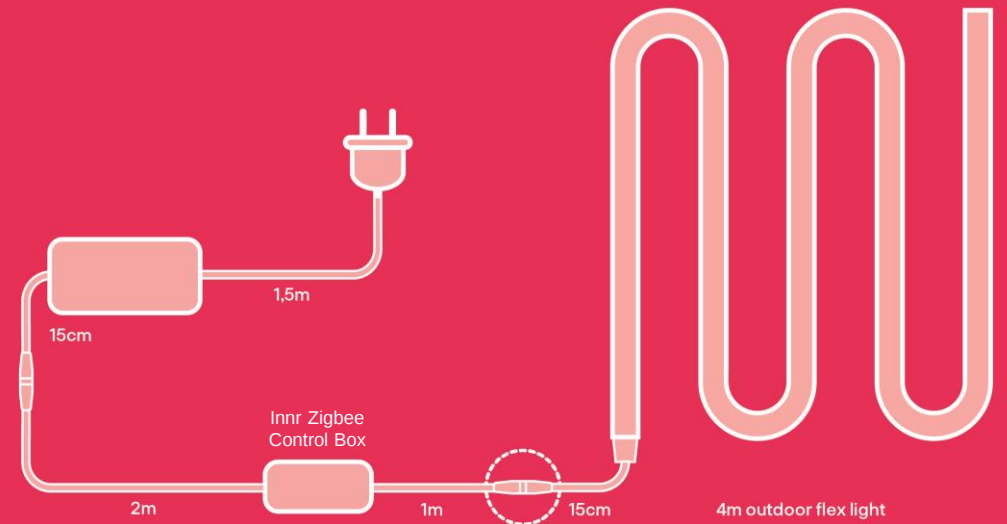



# Smart Outdoor Spot Light Colour 3-pack

OSL 130 C  
OSL 130 C /05 (UK)


- 3x Smart Outdoor Spot Light
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 14.5W
- 690lm total | 230lm per Spot Light
- RGB + 1.800K - 6.500K White | Beam angle 45°
- Dimming range 1%-100% | Dimensions 80mm x 80mm x 60mm Including control box and 24W power adaptor
- CRI > 80 | Life span > 30.000hrs
- IP65 | Operating temperature: -20-+40°C

## Extension items

- 2m & 5m Extension Cables available - [OEC 120 & OEC 150](#)
- Extension Spot Light & Extension Pederstal Light available - [OSL 130 C spot & OPL 130 CP](#)
- 48W Outdoor Power Adaptor available, to expand up to 10 lights - [OPS 140 & OPS 140 /05 \(UK\)](#)



# Connect up to 5 spot or pedestal lights

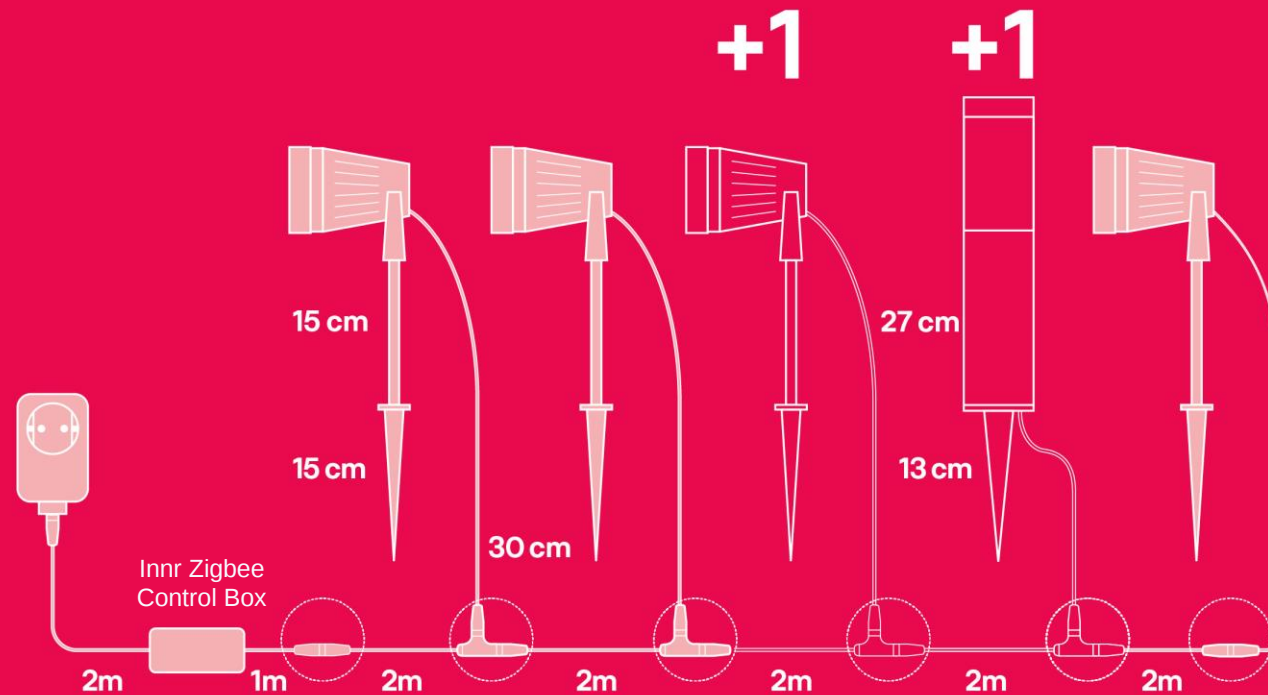

with the Innr Extension Pedestal Light (OPL 130 CP)  
or the Innr Extension Spot Light (OSL 130 C spot)



# Smart Outdoor Spot Light Colour Extension

## OSL 130 C spot

- 1x Smart Outdoor Spot Light
  - Extension pack to **OSL 130 C & OPL 130 C**
  - 24V DC, 4.5W
  - 230lm per Spot Light
  - RGB + 1.800K - 6.500K White | Beam angle 45°
  - Dimming range 1%-100%
  - Dimensions 80mm x 80mm x 60mm
  - CRI > 80 | Life span > 30.000hrs
  - IP 65 | Operating temperature: -20-+40°C
  - Connect up to max. 5 Outdoor Spot or Pedestal Light
- Note: Max. 5 Spots Lights to one 24W power adaptor (standard power adaptor of the set **OSL 130 C**)





# Smart Outdoor Pedestal Colour 3-pack

OPL 130 C

OPL 130 C /05 (UK)

- 3x Smart Outdoor Pedestal Light Light
- Zigbee Light Link (ZLL)
- 220-240V/50-60Hz, 24V DC, 14.5W
- 645lm total | 215lm per Pedestal Light
- RGB + 1.800K - 6.500K White | Beam angle 55°
- Dimming range 1%-100% | Dimensions H 272mm x ø 60mm  
Including control box and 24W power adaptor
- CRI > 80 | Life span > 30.000hrs
- IP65 | Operating temperature: -20-+40°C


## Extension items

- 2m & 5m Extension Cables available - [OEC 120](#) & [OEC 150](#)
- Extension Spot Light & Extension Pederstal Light available - [OSL 130 C spot](#) & [OPL 130 CP](#)
- 48W Outdoor Power Adaptor available, to expand up to 10 lights - [OPS 140](#) & [OPS 140 /05 \(UK\)](#)





# Connect up to 5 pedestal or spot lights

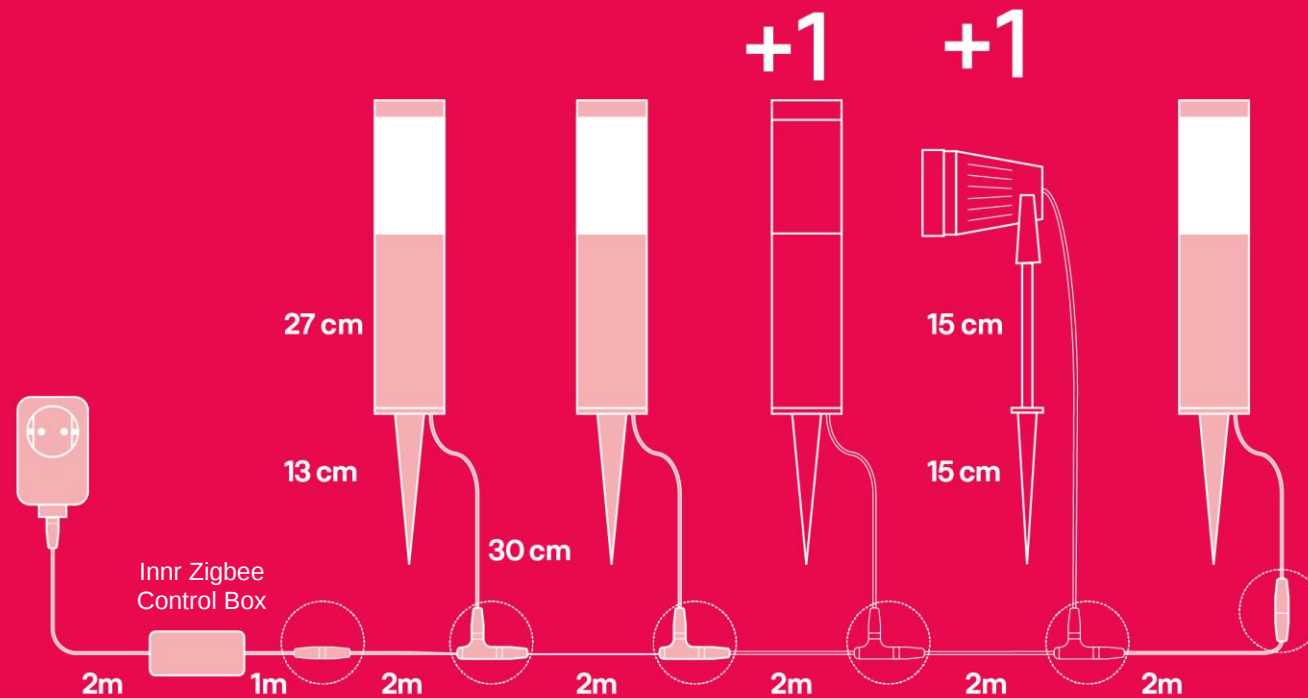

with the Innr Extension Pedestal Light (OPL 130 CP)  
or the Innr Extension Spot Light (OSL 130 C spot)



# Smart Outdoor Pedestal Extension Colour



## OPL 130 CP

- 1x Smart Outdoor Pedestal light
  - Extension pack to **OPL 130 C & OSL 130 C**
  - 24V DC, 4.5W
  - 215lm per Pedestal Light
  - RGB + 1.800K - 6.500K White | Beam angle 55°
  - Dimming range 1%-100%
  - Dimensions H 272mm x ø 60mm (excl. height of the spike)
  - CRI > 80 | Life span > 30.000hrs
  - IP 65 | Operating temperature: -20-+40°C
  - Connect up to max. 5 Pedestal or Spot Lights
- Note: Max. 5 Pedestal Lights to one 24W power adaptor (standard power adapter of the set **OPL 130 C**)



# Outdoor Extension Cable 2m

OEC 120

- **2-meter** Outdoor Extension Cable
- Suitable for Outdoor Spot Light **OSL 130 C**
- Suitable for Outdoor Pedestal Lights **OPL 130 C**
- Suitable for Outdoor Flex Light 2m **OFL 120 C**
- Suitable for Outdoor Flex Light 4m **OFL 140 C**
- Maximum total cable length: 35m
- IP 67 | Operating temperature: -20-+40°C



OFL 120 C



OFL 140 C



OSL 130 C



OSL 130 C spot



OPL 130 C



OPL 130 CP



# Outdoor Extension Cable 5m

## OEC 150



- **5-meter** Outdoor Extension Cable
- Suitable for Outdoor Spot Light **OSL 130 C**
- Suitable for Outdoor Pedestal Lights **OPL 130 C**
- Suitable for Outdoor Flex Light 2m **OFL 120 C**
- Suitable for Outdoor Flex Light 4m **OFL 140 C**
- Maximum total cable length: 35m
- IP 67 | Operating temperature: -20-+40°C



OFL 120 C



OFL 140 C



OSL 130 C



OSL 130 C spot



OPL 130 C



OPL 130 CP



# Outdoor Power Supply

OPS 140 (EU)  
OPS 140 /05 (UK)

- **48W** Outdoor Power Supply
- Upgrade for **OSL 130 C** and **OPL 130 C** (EU)  
**OSL 130 C /05** and **OPL 130 C /05** (UK)
- Allows to expand your outdoor lighting up to 10 lights
- Input: 100-240V, 50/60Hz, 1.3A | Output: 24V 2A 48W
- IP 68
- Replace the standard 24W Power Supply with the OPS 140 to start the extension to max. 10 Spots or Pedestals Lights.



OSL 130 C



OPL 130 C

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p> <b>innr</b></p> <p>Outdoor Power Supply 48W EU<br/>OPS 140 - XP 0003<br/>INPUT: 100-240V~ 50/60Hz 1.3A<br/>OUTPUT: 24V ~ 2000mA 48W<br/>IP68</p> <p>For use with Innr outdoor lighting<br/>Pour l'éclairage extérieur Innr<br/>Zur Verwendung mit Innr Außenbeleuchtung<br/>Voor gebruik met Innr buitenverlichting<br/>Para usar con la iluminación exterior Innr<br/>Da utilizzare con illuminazione esterna Innr</p> <p>Suitable for wet locations, do not submerge<br/>Convient aux emplacements mouillés, ne pas immerger<br/>Geeignet für feuchte Standorte, nicht eintauchen<br/>Geschikt voor natte locaties, niet onderdompelen<br/>Para ambientes húmedos, no sumergir<br/>Per ambienti umidi, non immergere</p> <p></p> <p>Made in China<br/>© Innr Lighting B.V. 2020<br/>Innr Lighting B.V.<br/>Hennepsteeg 50<br/>1217 JN Hilversum<br/>The Netherlands<br/>Tel. +31 (0)35 744 0388</p> <p>8 718781 552763</p> | <p> <b>innr</b></p> <p>Outdoor Power Supply 48W UK<br/>OPS 140 /05 - XP 0004<br/>INPUT: 100-240V~ 50/60Hz 1.3A<br/>OUTPUT: 24V ~ 2000mA 48W<br/>IP68</p> <p>For use with Innr outdoor lighting<br/>Pour l'éclairage extérieur Innr<br/>Zur Verwendung mit Innr Außenbeleuchtung<br/>Voor gebruik met Innr buitenverlichting<br/>Para usar con la iluminación exterior Innr<br/>Da utilizzare con illuminazione esterna Innr</p> <p>Suitable for wet locations, do not submerge<br/>Convient aux emplacements mouillés, ne pas immerger<br/>Geeignet für feuchte Standorte, nicht eintauchen<br/>Geschikt voor natte locaties, niet onderdompelen<br/>Para ambientes húmedos, no sumergir<br/>Per ambienti umidi, non immergere</p> <p></p> <p>Made in China<br/>© Innr Lighting B.V. 2020<br/>Innr Lighting B.V.<br/>Hennepsteeg 50<br/>1217 JN Hilversum<br/>The Netherlands<br/>Tel. +31 (0)35 744 0388</p> <p>8 718781 553050</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



Innr  
WiFi  
product range



# WiFi Bulb White & Colour

WBY 785 C-2



- WiFi Bulb B22 (UK)
- WiFi protocol
- 220-240V/50Hz, 9.5W
- 806lm – (ref. 60W incandescent bulb)
- RGB + 1.800K-6.500K White
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 108mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs

# WiFi Bulb White

WRB 765-2

- WiFi Bulb E27
- WiFi protocol
- 220-240V/50Hz, 9W
- 806lm – (ref. 60W incandescent bulb)
- 2.700K Warm White
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 110mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs



# WiFi Bulb White & Colour

## WRB 785 C-2

- WiFi Bulb E27
- WiFi protocol
- 220-240V/50Hz, 9.5W
- 806lm – (ref. 60W incandescent bulb)
- RGB + 1.800K-6.500K White
- Beam angle 240°
- Dimming range 5-100%
- Dimensions H 110mm x ø 60mm
- CRI > 80
- Life span > 25.000hrs



NEW!



# WiFi Filament Globe Vintage

WRF 761-2

- WiFi Filament Globe E27
- Wifi protocol
- 220-240V/50-60Hz, 4.5W
- 350lm – (ref. 30W incandescent)
- 2.200K Vintage (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 138mm x ø 95mm
- CRI > 80
- Life span > 15.000hrs

innr



Introduction expected: week 15 - 2021

NEW!



# WiFi Filament Bulb Vintage

WRF 763-2

- WiFi Filament Bulb E27
- Wifi protocol
- 220-240V/50-60Hz, 4.5W
- 350lm – (ref. 30W incandescent)
- 2.200K Vintage (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 105mm x ø 60mm
- CRI > 80
- Life span > 15.000hrs

innr



Introduction expected: week 15 - 2021

NEW!



# WiFi Filament Edison Vintage

WRF 764-2

- WiFi Filament Edison E27
- Wifi protocol
- 220-240V/50-60Hz, 4.5W
- 350lm – (ref. 30W incandescent)
- 2.200K Vintage (Filament)
- Beam angle 320°
- Dimming range 5-100%
- Dimensions H 145mm x ø 64mm
- CRI > 80
- Life span > 15.000hrs

innr



Introduction expected: week 15 - 2021



Thank you!